

DESCRIPTION

AMC MODEL AGT-2018-60D-100 IS A BROAD BAND VARIABLE ATTENUATOR/MODULATOR, 10dB/VOLT ANALOG CONTROLLED

SPECIFICATIONS

- FREQUENCY RANGE 2.0-18.0 GHz MINIMUM
- INSERTION LOSS 4.5 dB MAXIMUM
- ATTENUATION FLATNESS
(± dB MAXIMUM) 0-30 dB ±1.0 dB MAXIMUM
30-40 dB ±2.0 dB MAXIMUM
40-50 dB ±3.0 dB MAXIMUM
50-60 dB ±5.5 dB MAXIMUM
- ATTENUATION ACCURACY 0-10 dB ±2.0 dB MAXIMUM
10-20 dB ±1.0 dB MAXIMUM
20-40 dB ±1.5 dB MAXIMUM
40-60 dB ±2.0 dB MAXIMUM
- RISE & FALL TIME 3 nsec MAXIMUM
- VSWR 2.2:1 MAXIMUM
- RF POWER RATINGS
OPERATING +20 dBm CW MAXIMUM
+10 dBm (0.3 GHz OR BELOW)
SURVIVAL +30 dBm CW MAXIMUM
+27 dBm (0.3 GHz OR BELOW)
- CONTROL 10dB/VOLT ANALOG CONTROLLED
- POWER SUPPLY +12VDC @ 250 mA MAXIMUM, 210 mA TYPICAL
-12VDC @ 50 mA MAXIMUM, 30 mA TYPICAL
- CONNECTORS
RF INPUT/OUTPUT SMA FEMALE
POWER AND CONTROLS SOLDER PIN CONTROL
- SIZE 2.00" x 1.81" x 0.50"

AVAILABLE OPTIONS


- A01 TWO SMA MALE RF CONNECTORS
- A02 J1 SMA MALE, J2 SMA FEMALE
- A03 BLIND MATE CONNECTORS
- A04 5dB/VOLT SENSITIVITY
- A05 ±15VDC POWER SUPPLY
- A06 0 TO 30 dB RANGE

FLATNESS:	0 - 15dB: ±0.5dB	ACCURACY:	0 - 10dB: ±2.0dB
	15 - 20dB: ±1.0dB		10 - 20dB: ±1.0dB
	20 - 25dB: ±1.5dB		20 - 30dB: ±1.5dB
	25 - 30dB: ±2.0dB		
- A07 EXTENDED FREQUENCY RANGE UNIT AND OPTIONS
 200M18 OPTION EXTENDED BANDWIDTH (200 MHz - 18 GHz)
 300M18 OPTION EXTENDED BANDWIDTH (300 MHz - 18 GHz)
 10M18 OPTION EXTENDED BANDWIDTH (10 MHz - 18 GHz)
 219 OPTION EXTENDED BANDWIDTH (2 GHz - 19 GHz)
- A08 FREQUENCY BAND OF 2 - 18 GHz
- A09 FREQUENCY BAND OF 10 MHz - 2 GHz REFER TO DATA SHEET
 AGT-2000-60D-100 (SLIM LINE), FOR DIGITAL VERSION
 REFER TO DATA SHEET AGT-2000-60DD-100 (SLIM LINE)
- A10 FOR HIGH SPEED ≤1 nsec DIGITAL CONTROLLED UNITS AND
 EXTENDED FREQUENCY RANGE REFER TO DATA SHEET
 AGTN-2018-60DD-100 (SLIM LINE). FOR HIGH SPEED ANALOG
 CONTROLLED UNIT REFER TO AGTN-2018-60D-100 (SLIM LINE).
- A11 MOUNTING SURFACE UNPAINTED
- A12 FOR DIGITAL CONTROLLED UNITS REFER TO AGT-2018-60DD-100
 (SLIM LINE).
- SCS SPECIAL CUSTOMER SPECIFICATIONS

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION


REVISIONS				DATE	APPROVED
ZONE	REV.	DESCRIPTION			
	A	ORIGINAL RELEASE		08/05/97	AKG

MECHANICAL OUTLINE

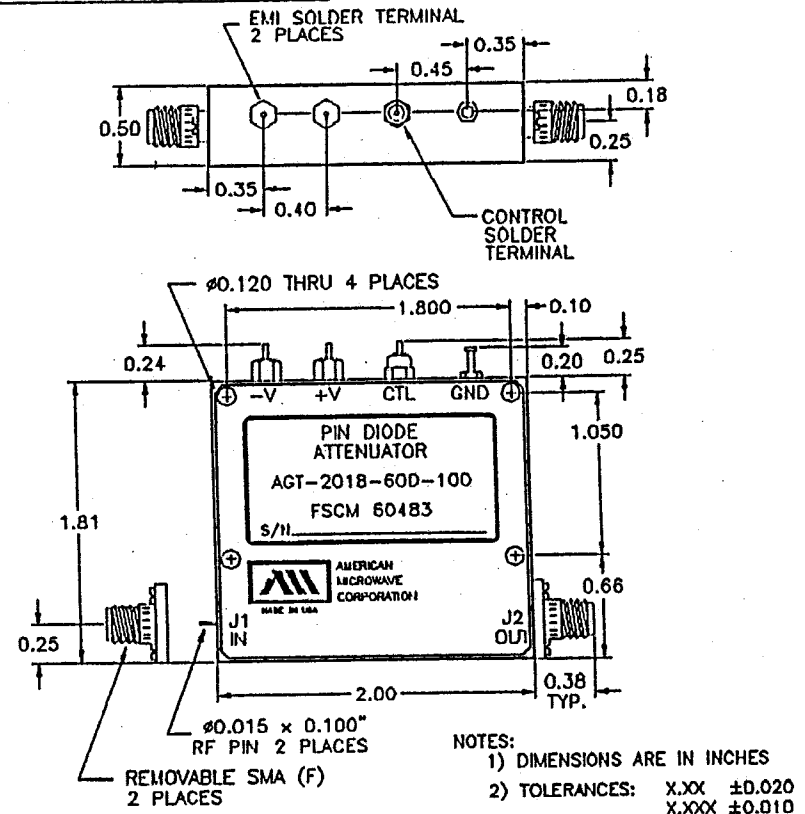

ENVIRONMENTAL RATINGS

- TEMPERATURE -55°C TO +125°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY MIL-STD-202F, METHOD 103B COND. B
- SHOCK MIL-STD-202F, METHOD 213B COND. B
- VIBRATION MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE MIL-STD-202F, METHOD 107D COND. A

		AMERICAN MICROWAVE CORPORATION 7311G GROVE RD., FREDERICK, MD. 21701 TEL: (301) 662-4700 FAX: (301) 662-4938	
APPROVALS DRAWN: WSP/DP CHECKED: J.M.J.		DATE 08/05/97 10/9/97	
PRODUCT FEATURE AGT-2018-60D-100 2-18 GHz, VOLTAGE VARIABLE ATTENUATOR		SIZE A SHEET 1 OF 2 DWG. # 100-4233	